


Kleanline® KH Series

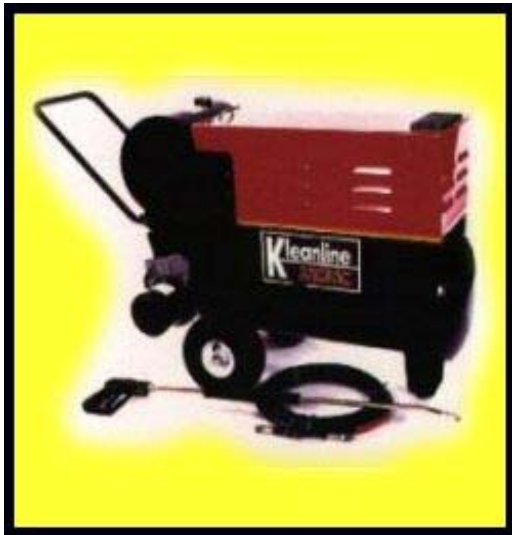

Horizontal, Hot Combinations, Oil Fired

The Kleanline® KH Series is a proven performer, with literally 1000's of machines hard at work everyday in the field. Our customers simply won't let us retire this popular model. It's key to success is our use of the highest quality components in a rugged but compact design. Slow speed, brass head pumps; schedule 80, 100% Water Wall™ coil design; and quality Beckett oil burners combine to produce a durable, low maintenance machine. The control switches are interlocked for safety and the components are protected by redundant pressure and temperature controls. Every heating coil is hydrostatically tested to 3000 PSI. The stainless water tank filters out impurities in the incoming water supply. To change from the high performance pressure wash mode to the super heated steam mode, simply turn one knob. All three models plug into any 20 Amp, 115 VAC outlet to produce the power and performance to blast through the toughest cleaning problem.

Model	PSI	GPM	Electricals	H.P.	Dimensions (Inches)	Weight
KH1022C	PW 1000 ST 400	PW 2.2 ST 1.3	115/60/1, 17 Amp	1.5	44 L x 24 W x 33 H	285 lbs.
KH1103C	PW 1050 ST 400	PW 2.8 ST 1.3	115/60/1, 19 Amp	2.0	44 L x 24 W x 33 H	295 lbs.
KH1502C	PW 1500 ST 400	PW 2.0 ST 1.3	115/60/1, 19 Amp	2.0	44 L x 24 W x 33 H	295 lbs.

Standard On All Models:

- ◆ Oil Fired Burner with Auto Ignition Control
- ◆ .840" O.D., Schedule 80 Heating Coil for Long Life
- ◆ Insulated, Horizontal, 100% Water Wall Firing Chamber
- ◆ Triplex, Ceramic Plunger, Oil Bath Pump
- ◆ Slow Pump Speed Extends Pump Life
- ◆ Watertite Interlocked Rocker Control Switches
- ◆ One Control Changeover From Pressure Wash to Steam
- ◆ Temperature Relief Valve, Pressure Relief Valve
- ◆ Temperature Limit Switch, Low Flow Safety Switch
- ◆ Stainless Float Tank with Float Control Valve
- ◆ Upstream Metered Chemical Injection
- ◆ Large 8 Gal. Fuel Tank, Oversize Filter System
- ◆ Hinged Equipment Access Cover
- ◆ Compact Design, Portable on Full Pneumatic Wheels
- ◆ Rugged Construction, Designed for Easy Maintenance
- ◆ 3/8" x 50' Steel Wire Combo Hose, Insul. Trigger Gun

Options Available:

- ◆ Ground Fault Interrupter Protection
- ◆ Variable Temperature Control
- ◆ 60 Second Auto-Stop™ Safety Feature
- ◆ Auto Start-Stop™ Remote Control
- ◆ Stainless Steel Machinery Cover
- ◆ Magnetic or Chemical Hard Water Coil Protection
- ◆ Downstream Chemical Injection
- ◆ Full Length Side Carry Handles
- ◆ 360 Deg. Swivel Hose Reel with Quick Coupler
- ◆ Stationary Mounting Bracket Kit

Custom Designs: Call For Any Application From 0-200 GPM and From 0-6000 PSI, Hot or Cold



Custom Klean Corp.
 8890 Boak Road
 Holland Patent, NY 13354
 (315) 865-8101
www.kleanline.com

© 2003 Custom Klean Corp.
 Form # KH2003

Distributed By: